

Installation & Operating Instructions: EZ-Reach Table System

1. Installing Base Plate (Figure A).

- a. Locate where you would like to install your EZ-Reach Base Plate(s).
- b. Make sure there is proper backer in the wall or add proper backer support in wall or behind any cabinet panel you plan to attached to.
- c. Use a proper fastener with good shear strength that is designed for the material you are attaching the base mount to.
- d. Use fasteners in all six mounting holes provided on the base mount plate (figure A). (all six fasteners need to hit backer support!)
- e. We recommend bolt-thru and plywood backer for cabinet mounting, lags for wood stud mounting, and appropriate self-tap metal lags for metal/wood filled studs

*note: It is recommended to check with your RV manufacturer before making alterations or additions for warranty and functionality compliance.

2. Installing Table Bracket (Figures A & B)

- a. Decide which way you would like to mount your T-Plate mount: (Figure B) There are two mounting locations (6-holes) marked on the bottom of the Ultra-lite table (figure A) that work with our Std T-Plate and Tilt Top T-Plate. The two mounting locations allow you to mount the T-plate in a centered position or off-center position. Only use the two mounting positions provided when using the Ultra-lite table top.
- b. Use the provided screws to attach the T-Plate (figure B) to the table (Figure A). You can drive the screws by hand or by power tool. It is recommended that if you use a power tool to finish off the tightening by hand so as not to strip out the hole. Make sure to hand tighten all four screws, do not use excessive force when tightening.

3. Putting your EZ-Reach Table System together

- a. Once you have your base mount (figure E) set and the T-Plate mount (figure B) attached to your top (figure A) you are ready to put the system together.

- b. Start by lining up the slotted channel on the Leg (figure D) with the base mount T channel. The slotted channel is on the back of the leg, opposite the lock knob. Slide the table leg onto the base mount plate and tighten down the knob to lock the base in place.
- c. Take your swivel arm (figure C) and slide the long tube end into the top of the table base (Figure D).
- d. Lastly, slide the T-Plate into the short receiving tube on the swivel arm.
- e. You can rotate the swivel table into any position that works best for your layout. When you find the position you like you can use the quick locks on both ends of the swivel arm to lock the table and arm into position. It is recommended to unlock the quick locks every time the table is swiveled to prolong the finish on the inner tube assembly of the swivel arm.

Note: **Stow EZ-Reach Table System when traveling!**


4. Operating the Tilt-Top Table Bracket.

- a. With your Tilt-Top T-Plate firmly installed to a table you are ready to adjust the tilt feature.
- b. Release the quick lock, pull up on the table and tilt to desired pitch, lock quick lock at desired pitch to set in place.

5. Installing Bumper Base mount

- a. The EZ-Reach Bumper Base Mount is designed to fit a standard 4" square travel trailer bumper.
- b. Use the provided stainless steel bolts and nuts to attach the base mount to the bumper bracket while the bumper bracket is in the desired location around the rear bumper.
- c. Tighten all nuts down and ensure the bracket is snug and does not slide around.

*note: It is recommended to check with your RV manufacturer before making alterations or additions for warranty and functionality compliance.

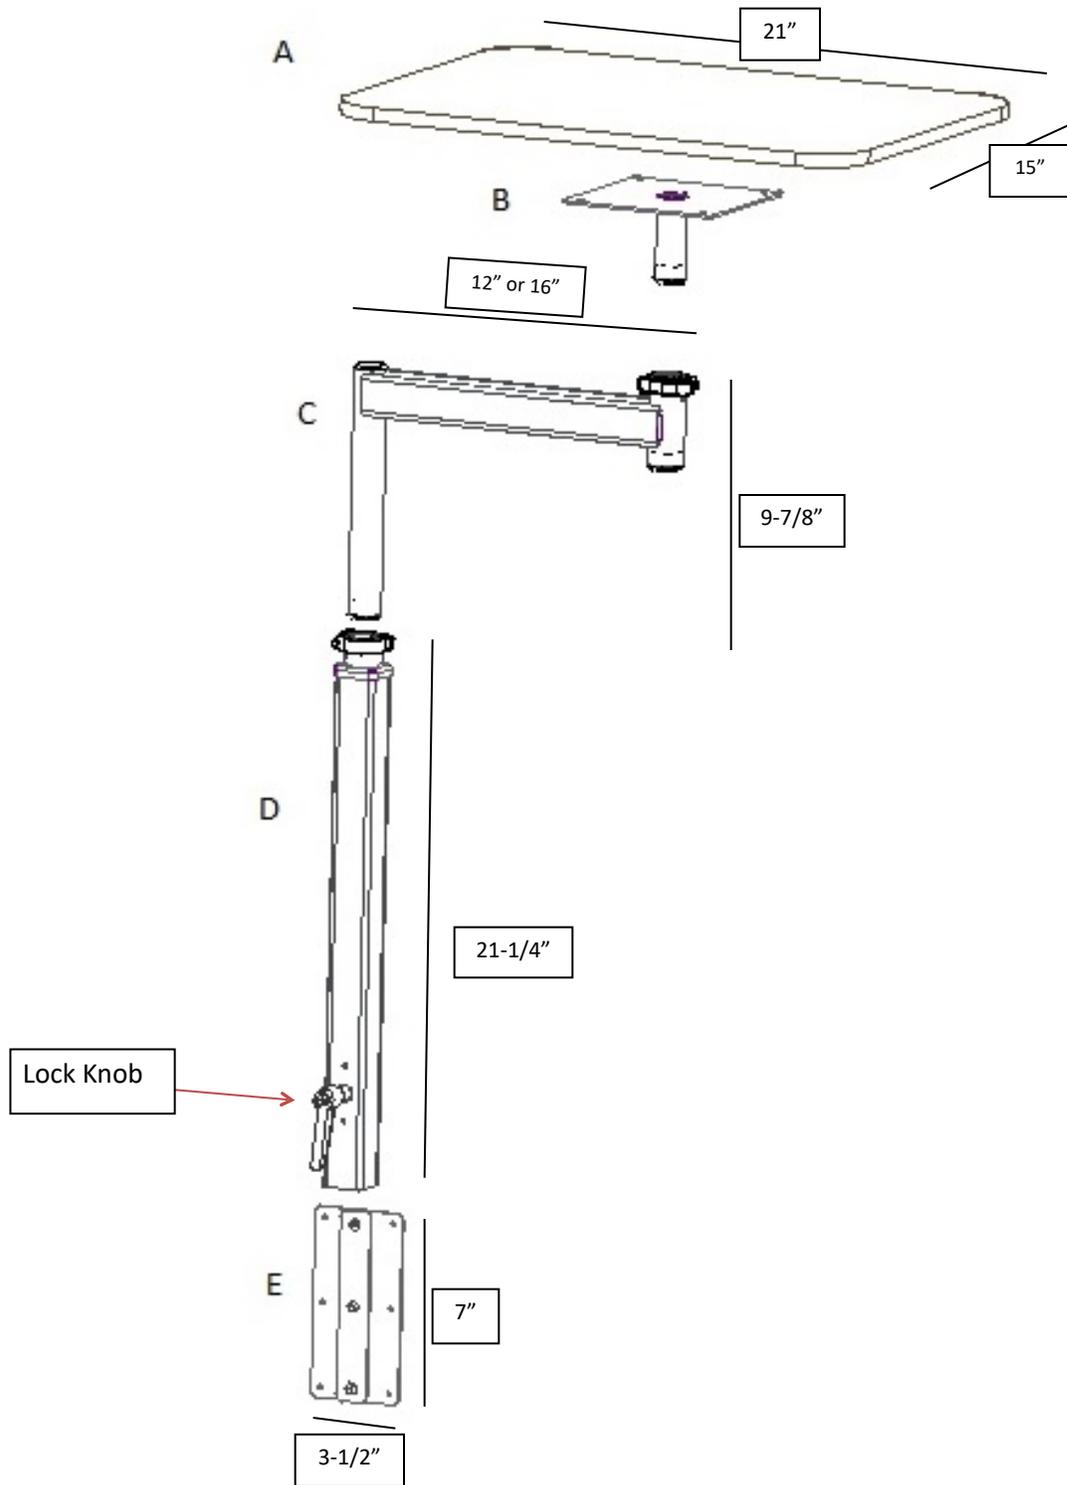

- A. Table Top
- B. Table Bracket
- C. Arm

D. Leg

E. Base Plate